



BRECKWELL

Hearth Products

THE BIG E

FORM MEETS FUNCTION



The BIG E Home Heater

***with ash pan and
large cast door***

***ECONOMICAL TO BUY
EFFICIENT TO OPERATE
EASY TO USE***

THE BIG E HOME HEATER

ECONOMICAL TO BUY—EFFICIENT TO OPERATE—EASY TO USE

Breckwell's BIG E Home Heater brings together ECONOMY, EFFICIENCY, and EASE of operation.

ECONOMICAL – When you compare the features and options you get with THE BIG E to similarly priced stoves you will see real value in this newest entry in the Breckwell line. THE BIG E brings to you all of the Breckwell reliability and craftsmanship at a very affordable price.

EFFICIENT – Whether you're operating your stove at its highest setting or heating at its lowest level it conserves pellet usage.

EASY TO USE – THE BIG E is operated with its digital one-touch control pad. No further adjustments are necessary.



Home Heater with optional 17.5" hopper extension






FEATURES and OPTIONS

- Large ash pan
- Large glass/cast iron door
- "Hot Rod" Automatic Firestarter
- Heats up to 2,200 square feet
- Digital one-touch control with diagnostics
- Up to 55,000 BTU heat input
- 13 tube heat exchange system
- Up to 140 lb. hopper capacity
- 81% fuel efficiency
- Two thermostat modes: high/low or on/off
- Five heat settings
- Low speed trim setting
- Removable burnpot with stainless steel insert
- Limited five-year warranty
- Optional radio frequency remote control
- Optional 210 lb. hopper extension
- EPA exempt

SPECIFICATIONS

Width: 25 3/4"
Height: 32 5/8"
Height (including hopper extension): 50"
Depth: 23 7/8"
Weight: 275 lbs.
Flue Size: 3"
Hopper Capacity: Up to 140 lbs.
 (This can vary widely depending on pellet size, length and diameter.)
EPA Status: exempt
BTU Range: 8,200–55,000
Approved Installations: mobile home, conventional

Pellet Vent Kit 3000 3 inch diameter kit contains a Horizontal Cap, 90° elbow, Wall Strap, Wall Thimble, Pipe Adapter and five one foot Pellet Vent pipe lengths as shown here.

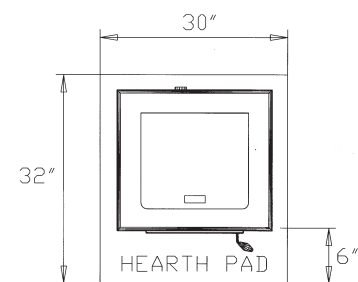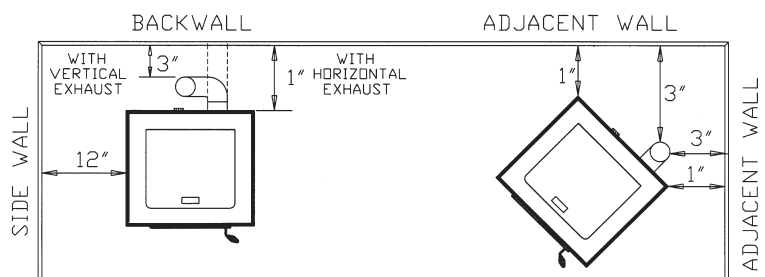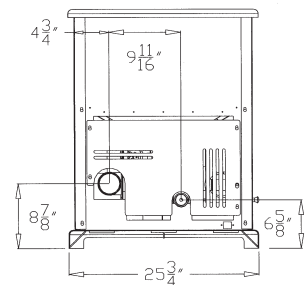

Pellet Vent chimney with a 25 year warranty UL and ULC listed.

Dura-Vent Pellet vent double-wall pipe is UL listed at 3 inch minimum clearance to combustibles. Installations of 15 feet or more, or when more than 90° of turn is required in the system, Breckwell recommends increasing from 3 to 4 inch pellet vent.



Hand-crafted in America
 EUGENE, OREGON • ARLINGTON, TEXAS

866-606-8444
 or visit our website at www.breckwell.com