

Gateway 2300

Features

- Simple Operation
- Easy to Maintain
- EPA 2020 Certified
- Limited Lifetime Warranty
- Multiple Design Options

Specifications


- Heating Area 500-2,100 sq. ft.
- Burn Time 8 hours
- Maximum Heat Output 75,000 BTUs
- Maximum Log Length 20 in.
- Firebox Size 2.4 cu. ft.
- Dimensions 32 1/4" H, 26 1/4" W, x 20 7/8" D


Options & Accessories


- 5 Base Options
 - Pedestal
 - Black Straight Legs
 - Nickel Straight Legs
 - Black Queen Anne Legs
 - Nickel Queen Anne Legs
- 2 Door Options
 - Nickel Door Overlay
 - Black Door Overlay
- Accessories
 - Step Top
 - Blower
 - Fresh Air Intake Kit
 - Fire Screen

Gateway 2300

DIMENSIONS

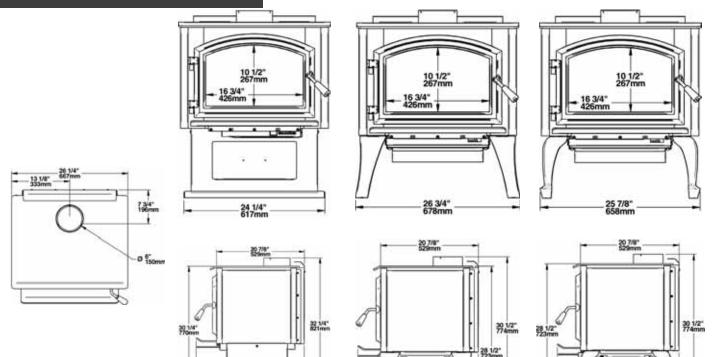






17 7/8" -

25.54"



21° 532n

25 5/8°

GATEWAY 2300						
	A	в	С	D	E	F
US	7*	16"	7"	10 1/4*	25 1/4"	16 1/2"
Canada	7*	17*	7*	10 1/4"	261/4*	16 1/2"

LIMITEDLIFETIME: Combustion chamber (welds only) and castiron door frame, Ceramic Glass, Plating (manufacture defect), step top. LIMITED 7YEAR: Surrounds, heat shields, ashdrawer, pedestal, C-Cast Baffle, secondary airtubes, deflectors and supports. LIMITED 5YEAR: Handle assembly, glass retainers, air control mechanism, removable carbon steel combustion chamber components. LIMITED 2YEAR: Standard and optional blower, heat sensors, switches, rheostat, wiring and electronics. LIMITED 1YEAR: Paint peeling, gaskets, insulation, ceramic fiber blankets, fire bricks and other options. LIMITED 90 DAY: All parts replaced under warranty.



20 1/8" 513mm

25 5/8° 652mm

info@empirestove.com