

Performer™ Model C210GL

Appliance Specifications - Factory-Built or Masonry Wood Fireplace Insert



Product Reference Information			
Cat. No.	Description	Ship. Weight	Ship. Volume
F4163	C210TGL, Insert, Traditional Black Door, Nickel Nameplate	463 lb.s	17.5 cu. ft.
F4162	C210AGL, Insert, Arch Black Door, Nickel Nameplate	463 lb.s	17.5 cu. ft.

C210GL

Chimney Diameter	6" (152mm)
Log Length	20" Max./18" Recommended
Firebox	20"W x 18"D (508mm W x 457mm D)
DEQ Efficiency	67.1%
Heating Capacity*	1,000-1,800 sq. ft
Max. Heat Output*	76,000 BTUs/hr.
Max. Burn Times*	7-9 hrs.

Optional Accessories

- Surround Panel Kits - Various sizes offered, 26-1/2" x 40", 26-1/2" x 48", 30-1/2" x 40", 30-1/2" x 48". Available in Gold, Nickel and Black.
- Faceplates - Available in traditional black, gold, nickel, brushed nickel.
- Handles - gold or nickel
- Thermal Activated Blowers (160-CFM) - black, gold, nickel, brushed nickel or brushed gold.
- Front Support 40"-48" Width/8"-0" Height

NOTES:

- *Diagrams, illustrations and photographs are not to scale – consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.*
- *Dimensions shown are approximations only (+/- 1/4")*
- *Square-foot heating capacities are approximations only. Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.*



Performer™ C210TGL with Traditional Door



Performer™ C210AGL with Arch Door and Blower

Performer™ Model C210GL insert is safety listed with the following agency:

- Listing Agency: PFS TECO. Listed to UL 1482, ULC S628



Report No. 14-185

EPA certification test emission value 1.55 g/hr per 2020 cordwood standard

Specifications

Options

Notes

Inserts

Listing

Performer™ Model C210GL

Hearth

Hearth Protection

The hearth and/or floor protection must be a thermally rated non-combustible hearth/floor protector meeting or exceeding a thermal rating of $k=0.84$ or equivalent with a listed thickness of 3/8" (9.5mm) minimum in USA (3/4" - 19mm minimum in Canada). The covering must extend 18" (450mm) in front of the heater and 8" (200mm) to either side (measured from door opening in the USA and measured from the side of the unit in Canada).

Model	*A	*B	*C	*D	E(1)
C210GL	USA-24" CAN-813mm	USA -18" CAN-660mm	18" 450mm	15" 381mm	USA-8" CAN-200mm
C210GL w/ mantel and/or side shields ①	USA-16" CAN-813mm	USA -10" CAN-660mm	18" 450mm	USA-8" 381mm	USA-8" CAN-200mm

Clearances

Model	F (1)	G	H	J(2)	M
C210GL	18" 450mm	12-1/4" 311mm	19" 483mm	4-1/2" 114mm	42-1/8" 1070mm
C210GL w/ mantel and/ or side shields ①	18" 450mm	12-1/4" 311mm	19" 483mm	4-1/2" 114mm	34-1/8" 867mm


* Reduced clearances may be available for A, B, C and D dimensions per NFPA 211 - latest edition, Standard for Chimneys, Fireplaces, Vents, and Solid Fuel-Burning Appliances (in Canada CSA B365 - latest edition). See section on "Reduction of Appliance Clearance with Specified Forms of Protection."

** Side view of optional mantel deflector shown.


(1)Hearth extension reductions: 2" (51mm) reduction for 2" (51mm) raised hearth. (USA) 16" minimum hearth extension on all stoves as measured from the door opening of the unit. (Canada) 18"(450mm) minimum hearth extension on all stoves as measured from the door opening of the unit. Minimum distance of floor protection to the side = 8" (200mm). This is measured from the sides of the door opening in the USA and from the sides of the insert in Canada.

(2) J = Maximum lintel depth without flue offset or smoke deflector.

NOTE: Facing material that projects more than 3/4" (19mm) from the wall is considered a mantel or side wall.

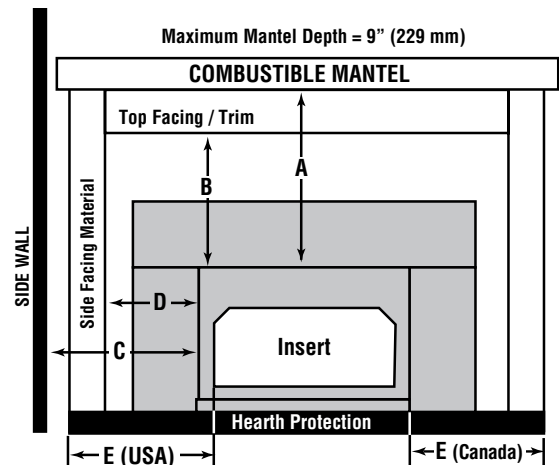

Clearance Figures

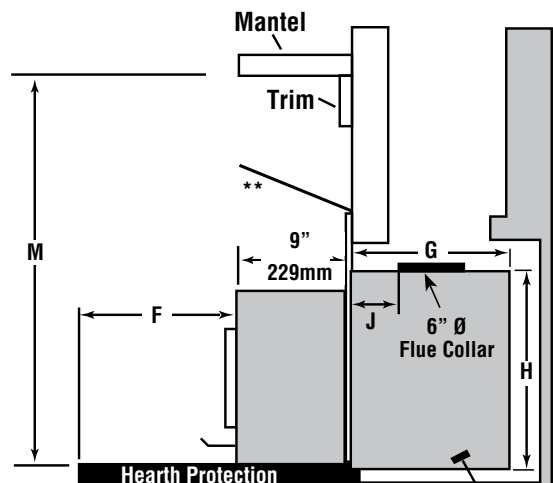

Fireplace Sizing		
C210GL	ZC Fireplace UL 127	Masonry Fireplace UBC Chapter 37
Depth Min.	12-1/2" (318mm)	12-1/2" (318mm)
Height Min.	21" (533mm)	19-1/4" (489mm)
Width Min.	36" (914mm)	26" (660mm)
Lintel Max. Depth ①	4-1/2" (114mm)	4-1/2" (114mm)

① Without use of adjustable offset box or smoke deflector