



Elegance, warmth and efficiency come together in these versatile gas fireplace inserts available with a variety of faces to suit any style.

LENNOX

HEARTH PRODUCTS

ELITE™ SERIES



Ravenna™ shown with Foundry face, Standard surround and Architectural Stone liner.

■ The hearth is the center of the home. Nothing draws family and friends together like the slow dance and radiant warmth of a fire. The Ravenna™ direct-vent gas insert and Designer™ B-vent gas insert offer the convenience of gas, the look of a real wood fire and a variety of face options to enhance any décor. The Ravenna is available in two heating capacities—33,000 or 40,000 BTUs—while the Designer comes standard with 30,000 BTUs to meet your unique home heating needs. Approved to fit most zero-clearance factory-built and masonry fireplaces, the Ravenna and Designer fireplace inserts turn your standard fireplace into a cost-effective heat source and warm, beautiful gathering place. ■

ARCH FACE



The Arch face, with its soft curve, creates the perfect frame for a dancing fire. A variety of finishes and insets allows you to customize your insert to fit your unique home and lifestyle. Choose from four different finishes (gold, brushed nickel, black nickel and black) and four different insets (Aspen™, Napa™, Pacific™ and Tuscan™) to build the perfect face for your décor.

INSET DESIGNS



Aspen™



Napa™



Pacific™



Tuscan™

AVAILABLE FINISHES



Gold



Brushed
nickel




Black
nickel



Black

SCREEN FACE

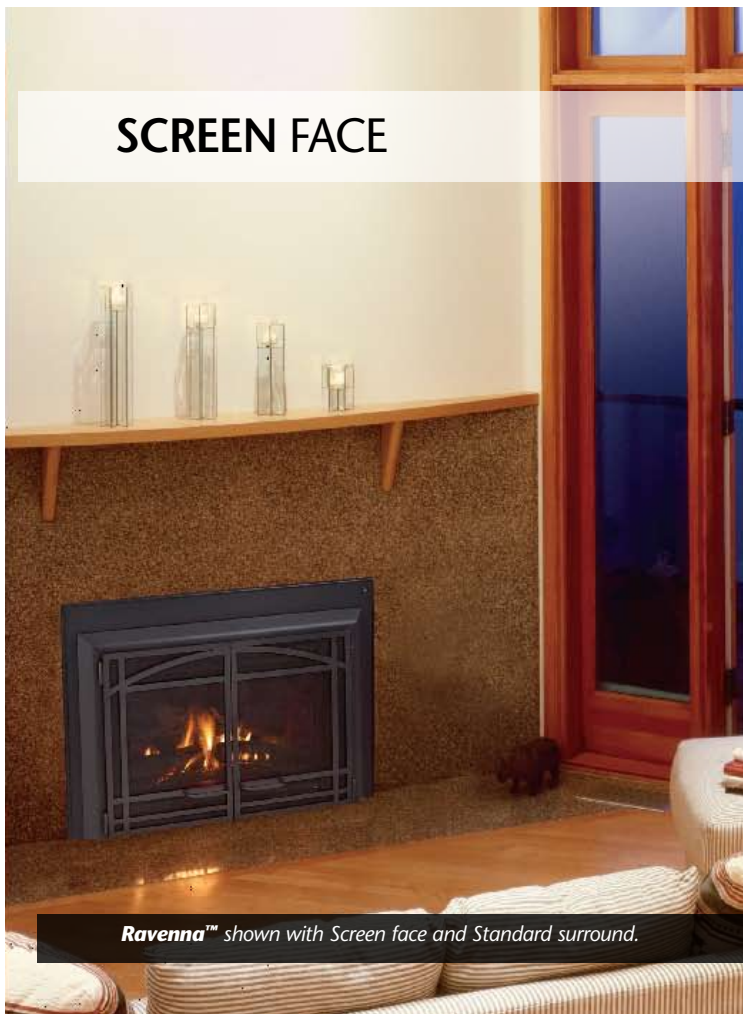

The Screen face has a clean aesthetic, accented with soft curves and a screen to diffuse the light of the dancing flames. The understated design of the face allows it to fit naturally into almost any style of home. With subtle elegance, the Screen face brings the timeless appeal of an open wood-burning fireplace to your home and provides a barrier to prevent direct contact with the hot glass surface.



Note: The Screen face may be used with or without a surround (see dealer for details).

TRADITIONAL FACE

The clean, understated lines of the Traditional face complement any room and any décor. Choose from four different finishes to achieve the perfect look.

AVAILABLE FINISHES



Gold



Black nickel



Brushed nickel



Black

Ravenna™ shown with black Traditional face, Standard surround and Architectural Stone liner.

FOUNDRY™ FACE

The Foundry™ face, with its hand-hammered black nickel straps, provides a rustic elegance to any home. Each face is individually crafted and forged by hand, making it a truly unique piece. The Foundry is more than a face, it is a work of art that will be enjoyed for years to come.



Note: The Foundry™ face may be used with or without a surround (see dealer for details).

Ravenna shown with Foundry face, Standard surround and Architectural Stone liner.

CAST PILLAR FACE



Designer™ shown with Cast Pillar face, Bar grilles, Cast surround, and Tan brick liner.

Few materials provide the strength and elegance of cast iron. The Cast Pillar face, with delicate Filigree grilles or with the more contemporary Bar grilles, will complement and anchor any room. The dimension and beauty of a cast face and a large bay window combine to create a striking piece of architecture for your home.



Cast Pillar face with Bar grilles



Cast Pillar face with Filigree grilles

SPECIFICATIONS

DESIGNER™ B-VENT GAS INSERT

HEATING CAPACITY*	500–1,500 SQ. FT.	
INSERT WEIGHT	155 LBS.	
BTU INPUT	NATURAL GAS	HIGH 30,000 / LOW 21,000
	LP GAS (PROPANE)	HIGH 28,500 / LOW 19,950
CANADIAN ENERGYGUIDE	NATURAL GAS	55.63%
RATING	LP GAS (PROPANE)	57.89%
STEADY-STATE EFFICIENCY**	82%– 86%	
BLOWER	155-CFM	
	VARIABLE-SPEED BLOWER (STANDARD)	
VENT PIPE	4" GAS RATED B-VENT OR	
	LISTED SINGLE-WALL GAS VENT CHIMNEY LINER	

*Square-feet heating capacities are approximations only. Local conditions such as elevation, wind, vent configuration and choice of fuels will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

**Efficiency varies slightly with various pipe configurations.

RAVENNA™ 33 DIRECT-VENT GAS INSERT

HEATING CAPACITY*	500–1,500 SQ. FT.	
INSERT WEIGHT	151 LBS.	
BTU INPUT	NATURAL GAS	HIGH 33,000 / LOW 24,000
	LP GAS (PROPANE)	HIGH 33,000 / LOW 24,000
CANADIAN ENERGYGUIDE	NATURAL GAS	65.55%
RATING	LP GAS (PROPANE)	67.80%
STEADY-STATE EFFICIENCY**	83%–86%	
BLOWER	155-CFM	
	VARIABLE-SPEED BLOWER (STANDARD)	
VENT PIPE	COLINEAR 3" FLEX VENT	

RAVENNA™ 40 DIRECT-VENT GAS INSERT



HEATING CAPACITY*	900–2,000 SQ. FT.	
INSERT WEIGHT	151 LBS.	
BTU INPUT	NATURAL GAS	HIGH 40,000 / LOW 28,000
	LP GAS (PROPANE)	HIGH 37,500 / LOW 26,000
CANADIAN ENERGYGUIDE	NATURAL GAS	67.17%
RATING	LP GAS (PROPANE)	69.07%
STEADY-STATE EFFICIENCY**	83%–86%	
BLOWER	155-CFM	
	VARIABLE-SPEED BLOWER (STANDARD)	
VENT PIPE	COLINEAR 3" FLEX VENT	

NOTE: The Ravenna 33/40 gas insert is shipped as a 40,000-BTU unit and includes a kit that enables field conversion to 33,000-BTU. There is only one insert model number.

CUSTOMIZE TO YOUR TASTE

STEP 1: MODEL AND BTU LEVEL

Choose your model and, if applicable, match the area you want to heat with the BTUs required.

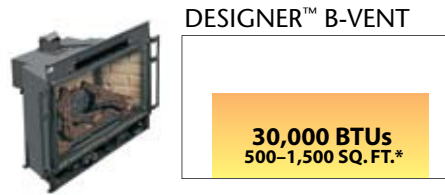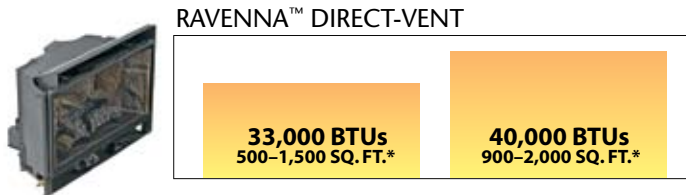

STEP 2: FACE

Choose your face and finish.

A) Arch



Choose your face color and choose your inset color. All faces and insets available in gold, brushed nickel, black nickel and black.

B) Traditional



Gold



Black nickel



Brushed nickel



Black

C) Screen**



D) Foundry™



E) Cast Pillar



Cast Pillar face with Filigree grilles



Cast Pillar face with Bar grilles

STEP 3: LINER (required)

Choose a brick liner to customize your insert.

Ravenna



Tan brick



Red brick



Architectural Stone

Designer



Brick liner (included with unit)

STEP 4: SURROUND AND TRIM

Choose your surround and trim.

Standard surround



Trim



Black
(Standard)



Nickel
(Option)



Gold
(Option)

Cast surround



Available for use with
Cast Pillar face only

STEP 5: THERMOSTAT (optional)

Adjust the comfort level of your room with a convenient wall-mounted thermostat or a versatile remote thermostat.



*Square-foot heating capacities are approximations only. Local conditions such as elevation, wind, vent configuration and choice of fuels will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

**Provides a barrier to prevent direct contact with the hot glass surface.

RAVENNA™ DIRECT-VENT GAS INSERT



STANDARD FEATURES

Variety of faces and finishes available to complement a broad range of architectural styles

Operates without power—still heats during a power outage

Beautiful, realistic log set

State-of-the-art burn technology provides the flame appearance of an authentic wood-burning fire

Realistic fireplace depth

Approved for zero-clearance (metal) and masonry fireplaces

155-CFM blower to circulate warmth in your home

Heavy, 14-gauge aluminized steel firebox construction

One-touch On/Off switch for easy operation

Easy-access controls with a hinged door and no-fuss magnet latch

Insert surrounds available in a variety of sizes and styles

Limited Lifetime Warranty

Backed by the Good Housekeeping Seal

OPTIONAL ACCESSORIES

Remote thermostat

Wall-mounted thermostat


Propane conversion kit

DESIGNER™ B-VENT GAS INSERT




DIRECT-VENT AND B-VENT MODELS

Elite™ Series gas inserts are available in two venting configurations. The Ravenna™ is a direct-vent insert. Direct-vent inserts receive 100% of their combustion air from outside the home and are ideal for airtight homes or bedrooms, bathrooms and basements. The Designer™ is a B-vent insert. B-vent inserts draw combustion air from inside the home so they require less chimney flue space for ducting. Both systems feature ceramic-glass panels that seal the combustion area for efficiency and safe indoor air quality.

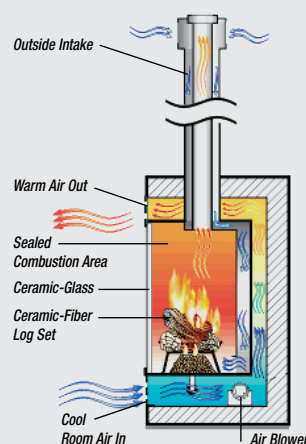

DIRECT-VENT


Draws combustion air from outside and returns combustion exhaust back to the outside of the home.

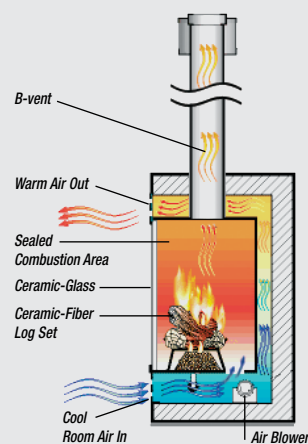

B-VENT


Draws combustion air from inside the home and vents combustion exhaust to the outdoors.

RAVENNA™ DIMENSIONS

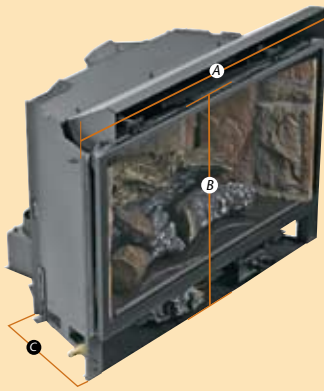


A	FRONT WIDTH	31-1/4"
B	OVERALL UNIT HEIGHT*	19-1/2"
C	UNIT DEPTH	15-3/4"
D	REAR HEIGHT TO CENTERLINE OF 3" FLUE COLLAR	18-1/2"
E	DEPTH TO CENTERLINE OF 3" FLUE COLLAR	14-1/2"


*Without hood

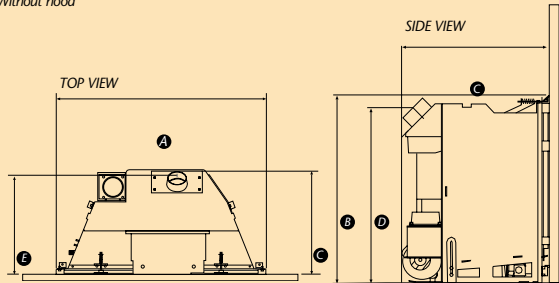


DESIGNER™ DIMENSIONS

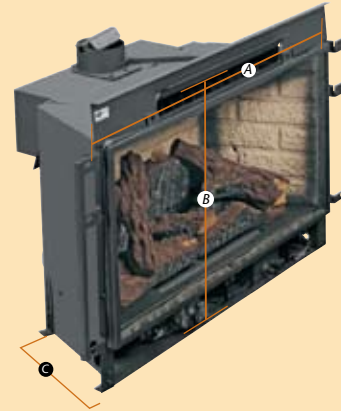

A	FRONT WIDTH	28"
B	OVERALL UNIT HEIGHT	21-3/4"
C	UNIT DEPTH	15-3/8"
D	REAR HEIGHT TOP OF FLUE COLLAR	20-1/8"
E	DEPTH TO CENTERLINE OF 4" FLUE COLLAR	12"

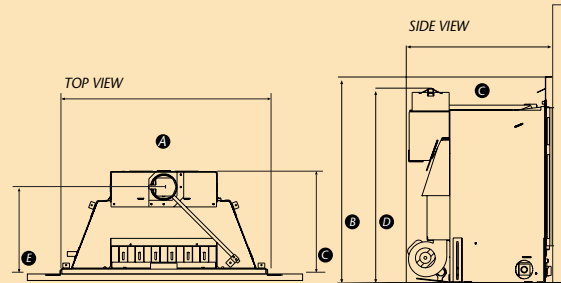

CLEARANCES

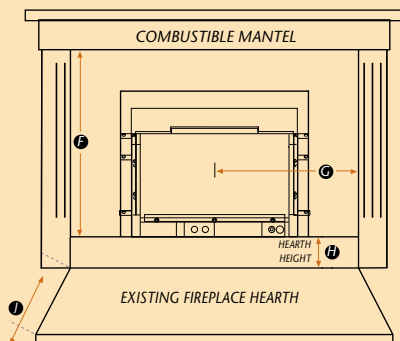

	RAVENNA 33	RAVENNA 40	DESIGNER
F	31-1/2"	35-1/2"	32"
G	25-1/2"	25-1/2"	24-1/2"

	RAVENNA 33	RAVENNA 40	DESIGNER
H	0" 2" 4"	0" 2" 4"	0" 2" 4"
J	13" 10" 0"	14" 10" 0"	13" 10" 0"

Material hearth protection to be min. 3/8"-thick non-combustible material.

INSERT SURROUNDS

Traditional surround ships with black trim.
Gold or nickel surround trim kits available.

STANDARD SURROUND (THREE PIECES)	STANDARD SURROUND (ONE PIECE)
29"H x 41"W	29"H x 41"W
29"H x 48"W	
33"H x 41"W	CAST SURROUND
33"H x 48"W	30"H x 45-1/2"W

MINIMUM FIREPLACE OPENING

	RAVENNA	DESIGNER
FRONT WIDTH	31-1/2"	30-1/2"
HEIGHT	19-3/4"	21"
REAR WIDTH	19"	19"
DEPTH	16"	15-1/2"



EnerChoice designation applies to
Ravenna fireplace insert.

IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.


Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuation without notice.

LENNOX
HEARTH PRODUCTS

© Lennox Industries Inc. 2010

Visit us at www.lennox.com, or contact us at 1-800-9-LENNOX.



Portland
Oregon USA
OMNI-Test Laboratories, Inc.