


# FLEXI-LINER®

## *Flexible Aluminum Chimney Liner for Gas Appliances*

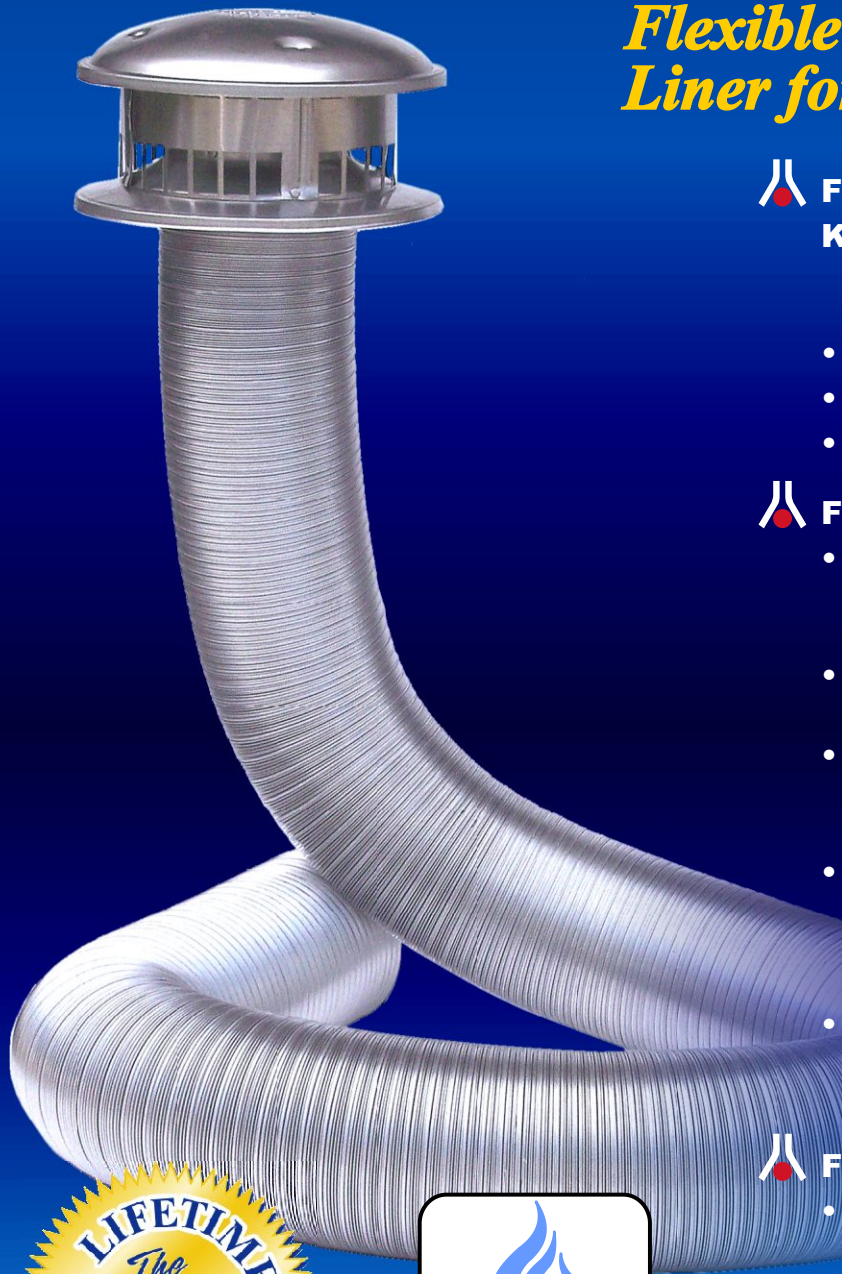

### **FLEXI-LINER KITS**

**Kits include:** Flexi-Length, Round Top (RV), Flashing with 3" collar, Mortar Guard


- Available in 25' & 35' Lengths
- 3" to 8" Diameters
- 15' Kits also available in 3", 4" & 5" dia.

### **FLEXI-LINER ACCESSORIES**

- **Flexi-Extension Kits**  
Flexi-Liner Tube with attached coupler and fastener package
- **Flexi-Sleeve**  
Insulation sleeve with tough poly exterior
- **Flexi-Coupler**  
Fitting with rivets for joining Flexi-Liner sections
- **Pull Down**  
Tool to stretch and lead Flexi-Liner Tube down chimney, also assists in pulling Flexi-Sleeve over Liner
- **B-Vent Adapter**  
Fitting to adapt Flexi-Liner to all brands of Type B-Vent

### **FLEXI-LINER APPROVALS**

- **USA**  
UL 1777 Chimney Liners
- **CANADA**  
ULC S635 Liners for Existing Masonry and Factory-Built Chimneys and Vents

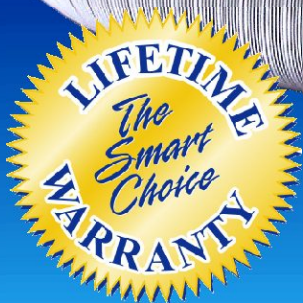

GAS



• **STRONG** • **DURABLE** • **FLEXIBLE** • **COMPRESSIBLE** •

# FLEXI-LINER®

## *Flexible Aluminum Chimney Liner for Gas Appliances*

### *Flexible Chimney Liners have two primary ways of protecting your chimney:*

*The Flexi-Liner contains the vent gases which can react with moisture to damage the inside of your chimney.*

- Flue gas condensation from a gas-fired heating appliance is a masonry chimney's worst enemy. An acidic solution is formed when condensation mixes with chemicals or residue in the chimney resulting in deterioration from the inside of the chimney.

*Flex-Liners reduce the size of the chimney opening, so less heat is required to effectively exhaust the fumes and prevent moisture build up.*

- The correct size Flexi-Liner Kit will reduce the majority of destructive condensation which forms inside your chimney.
- One compact carton contains all required components for one complete lining system.
- Installing an optional insulating Flexi-Sleeve over a Flexi-Liner tube will enhance the liner's performance and increase the life expectancy of the liner.

### **Specifications:**

Liner Material	Aluminum 3003, 2-ply (0.005" each)
Maximum Flue Gas Temperature	470°F
Available Size Range	3" to 8" diameter
Standard Kit Lengths	25' and 35' (15' Kits available for 3", 4" and 5")
Stretch Ratio	5:1 (approximate)
Clearances	0" between liner and chimney interior 0" between combustible materials and chimney exterior
Warranty	"Smart Choice" Lifetime Warranty



375 Green Road,  
Stoney Creek, ON L8E 4A5  
Toll Free: 1.888.SELKIRK (735.5475)

[www.selkirkcorp.com](http://www.selkirkcorp.com)

1301 W. Pres. George Bush Highway  
Richardson, TX 75080-1139  
Toll Free: 1.800.992.VENT (8368)