

TOP VIEW


ELECTRICAL CONNECTION REQUIREMENTS

CIRCUIT	CONNECTION METHOD	BTUS
15 AMP, 120V/60 Hz	Hardwire or plug-in	5,000


MINIMUM CLEARANCES TO COMBUSTIBLES

AREA	CLEARANCES
SIDES	0 "
FLOOR	0 "
TOP TO MANTEL	5/8" [16]
ВАСК	0 "
FRONT	36" [914]

FINISHING DIMENSIONS

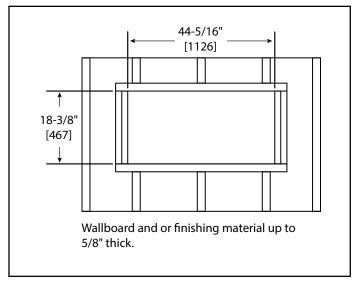

RECESSED 2 X 4 WALL

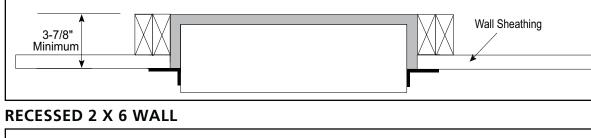



PRODUCT LISTING CODES		
US	CSA 22.2 No 46-M1988	
INTERNATIONAL	CSA 22.2 No 46-M1988	


Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.





SimpliFire — A Brand of Hearth & Home Technologies 7571 215th Street West | Lakeville, MN 55044 888-427-3973 | 952-985-6000 | fireplaces.com

APPLIANCE LOCATION

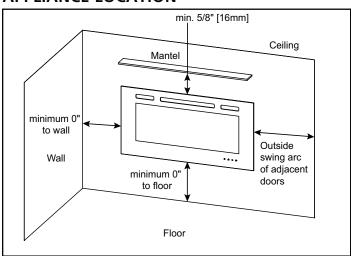

WALLBOARD SHEATHING

