
Specifications SF-ALLP50-BK



Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.

Allusion Platinum 50" Recessed Linear Electric Fireplace

MODEL	FRONT WIDTH		BACK WIDTH		FRONT HEIGHT		BACK HEIGHT		DEPTH		VIEWING AREA
	Actual	Framing	Actual	Framing	Actual	Framing	Actual	Framing	Actual	Framing	VIEWING AREA
SF-ALLP50-BK	52-5/16" [1329]	51" [1295]	50-1/2" [1283]	51" [1295]	20-7/16" [519]	19-3/4" [502]	19-3/8" [492]	19-3/4" [502]	5-5/8" [143]	2x6	48" x 15" [1219 x 381]

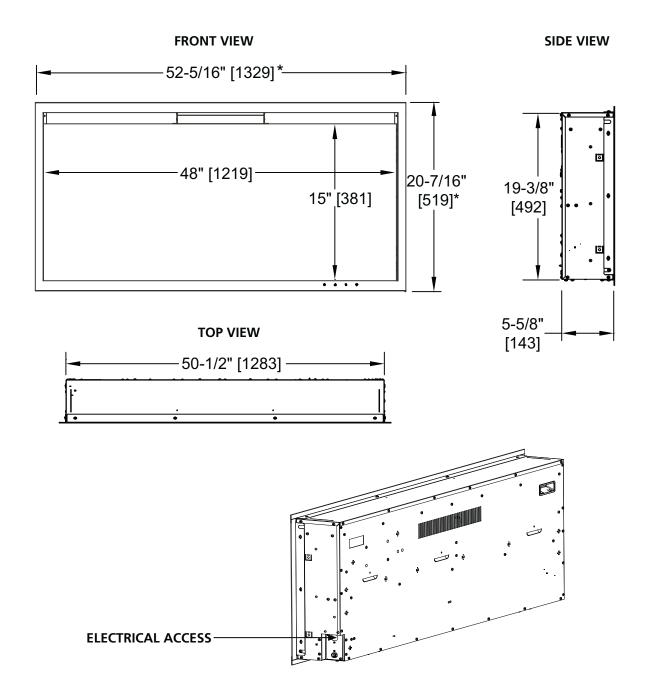

ELECTRICAL CONNECTION REQUIREMENTS


CIRCUIT	CONNECTION METHOD	BTUS
15 AMP, 120V/60 Hz	Hardwire or plug-in	5,000

Specifications SF-ALLP50-BK

MINIMUM CLEARANCES TO COMBUSTIBLES

AREA	CLEARANCES		
SIDES	0 "		
FLOOR	0 "		
TOP TO MANTEL	5/8" [16]		
BACK	0 "		
FRONT	36" [914]		


APPLIANCE LOCATION

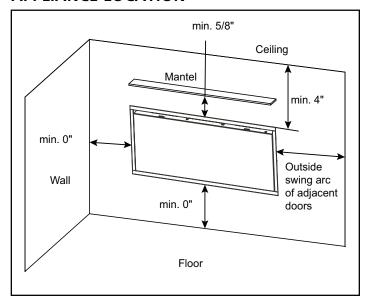


PRODUCT LISTING CODES				
us	CSA 22.2 No 46-M1988			
INTERNATIONAL	CSA 22.2 No 46-M1988			

Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.

FINISHING DIMENSIONS

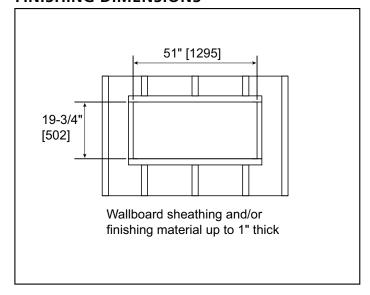

MANTEL PROJECTIONS

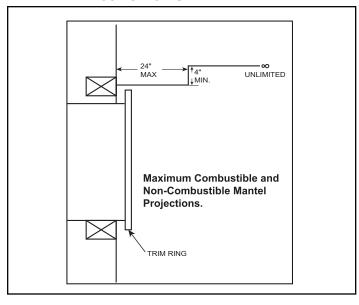

ELECTRICAL CONNECTION REQUIREMENTS

CIRCUIT	CONNECTION METHOD	BTUS
15 AMP, 120V/60 Hz	Hardwire or plug-in	5,000



