


COMPAK

WOOD STOVE

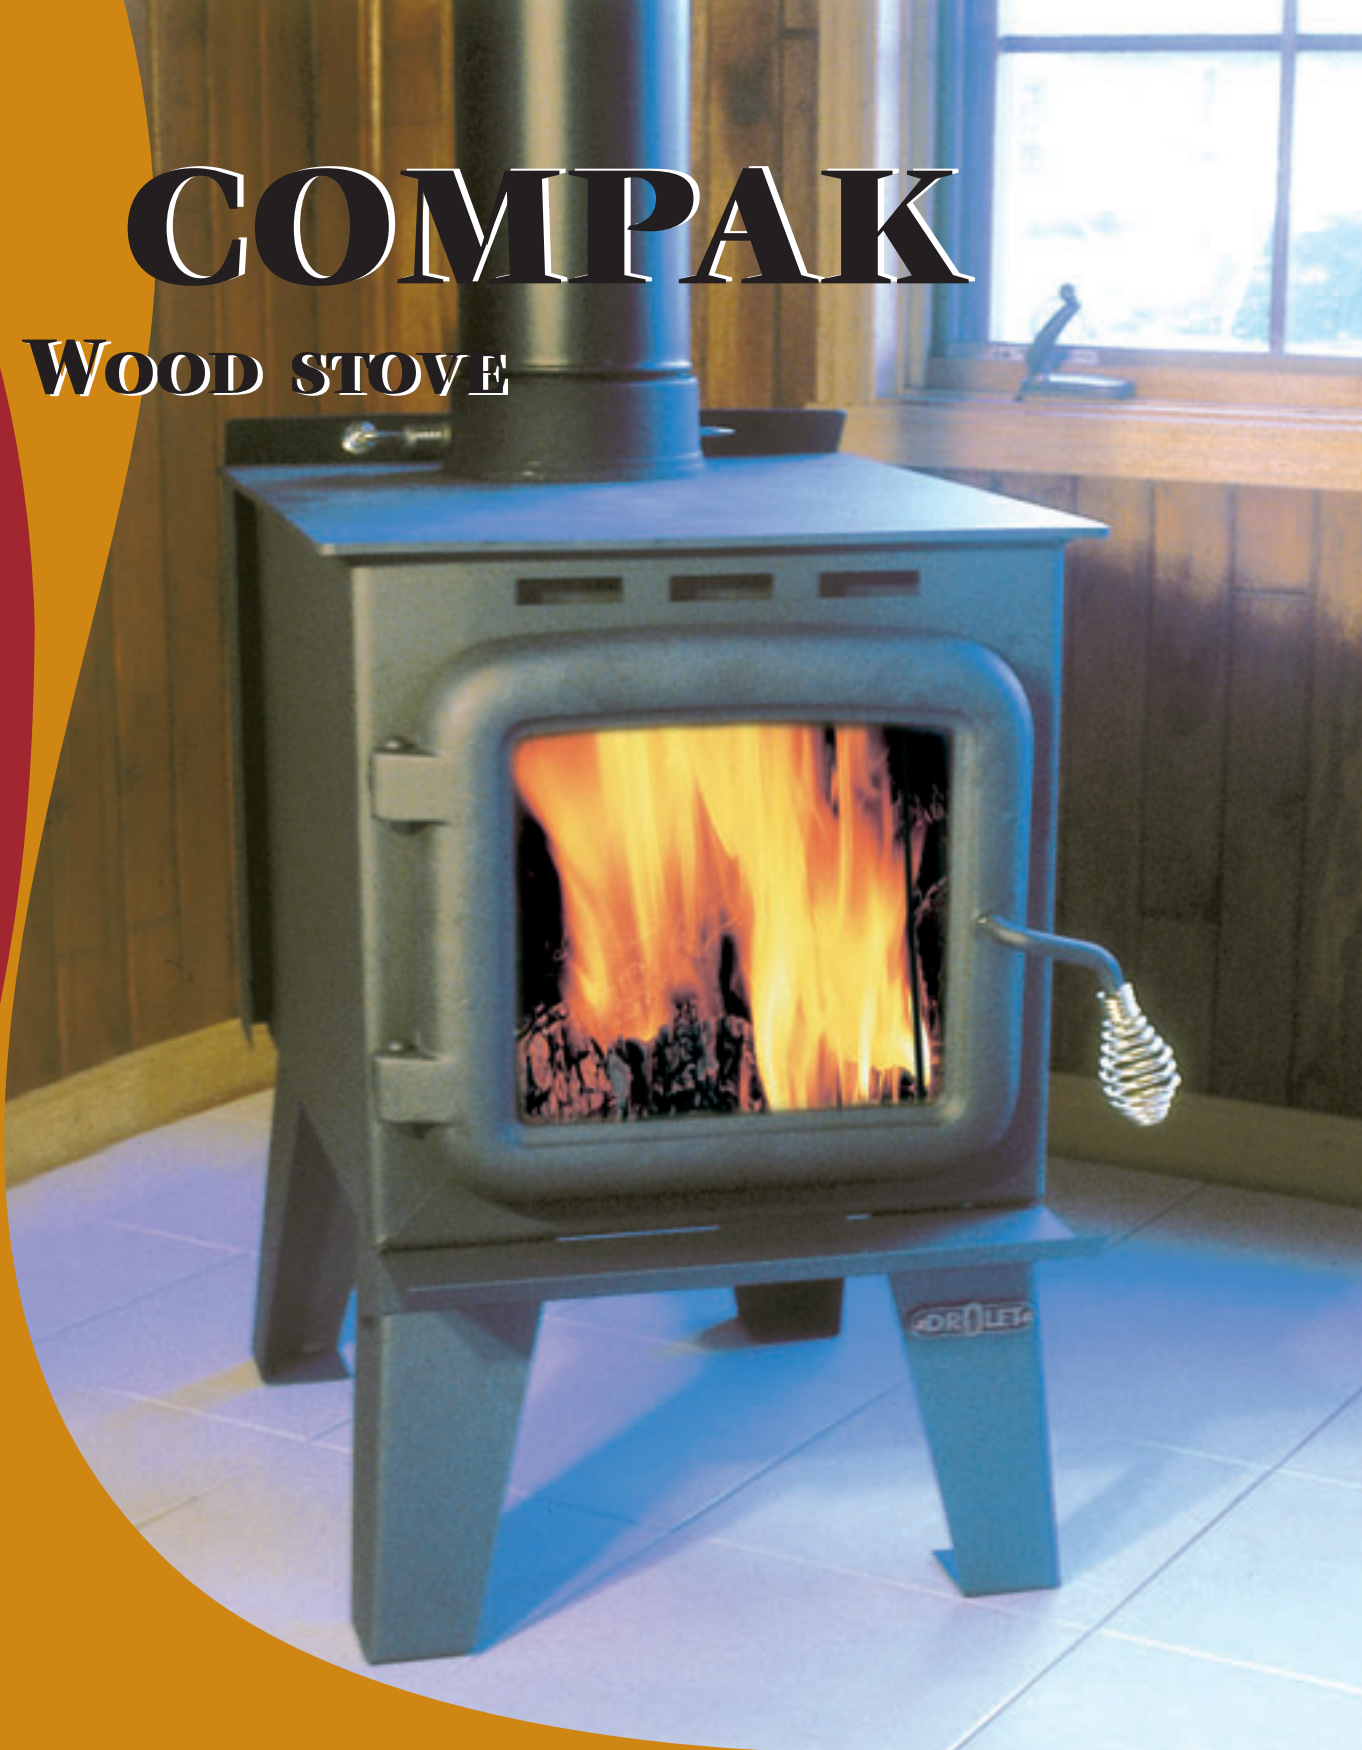

EPA exempt

Firebox volume of 1.75 ft.³

77,000 BTU

Removable stainless steel baffle


www.drolet.ca



BY: **SBI**

1700, Léon-Harmel
Québec (Québec) G1N 4R9
Tél. : (418) 527-3060
Fax : (418) 527-4311
www.drolet.ca
info@drolet.ca

Technical data



Compak

Recommended surface :	600 to 1,500 ft ²		
Combustible type :	Wood		
Heating capacity(BTU)	E.P.A. Exempt :	77,000 BTU	
Color :	Charcoal		
Exterior dimensions (in) :	Width :	18"	
	Depth :	25 11/16"	
	Height :	26 5/32"	
Flue pipe diameter :	6"		
Chimney type :	2,100 °F		
Minimum chimney height (ft) :	12'		
Firebox dimensions (in):	Width :	13 5/8"	
	Depth :	18 1/4"	
	Volume :	1.75 ft ³	
Log loading over :	Depth		
Maximum log length (in) :	16"		
Door opening dimensions (in)	Width :	11 1/4"	
	Height :	10"	
Door type :	Glass/Cast iron		
Pyroceramic glass surface (in) :	Width :	9 7/8"	
	Height :	8 7/8"	
Weight :	187 lbs		
Limited warranty :	3 years		

CLEARANCES TO COMBUSTIBLES (IN) :

Model	FROM THE STOVE				FROM THE FLUE PIPE			
	Back	Sides	Corners	Height*	Back	Sides	Corners	Height
COMPAK	29"	30"	22"	7'	34 3/4"	39"	32"	N/A

* From hearth pad to ceiling

Special Features:

- Comes with cast iron flue collar and damper
- Removable stainless steel baffle

Options

- Ultraquiet crossflow blower with variable speed control
- Thermodisc kit



This Drolet EPA exempt stove is approved by Warnock Hersey according to UL-1482-1997, EPA (Environmental Protection Agency) method 28A, 5G-3, and 40CFR part 60 standards.

